



Research Article

EVALUATION STUDIES OF ATTRITION MILL USED IN FINGER MILLET PROCESSING INDUSTRIES

SHANKAR M.*, JAYAPRAKASH R., HULKOTI S., REVANNAVAR R., SATHEESHA N., MOHANKUMARA V. AND VIDYASHREE S.M.

Zonal Agricultural and Horticultural Research Station, Brahmavar, Udupi, 576213, Keladi Shivappa Nayaka University of Agricultural and Horticultural Sciences, Shivamogga, 577412, Karnataka, India

*Corresponding Author: Email - shankar4266@gmail.com , jjayaprakashr@gmail.com

Received: August 02, 2023; Revised: September 26, 2023; Accepted: September 28, 2023; Published: September 30, 2023

Abstract: The treatments of the experiment include three plate clearances (0.3, 0.5 & 0.7 mm), three plate speeds (450, 600 & 700 rpm) and three feed rates (90, 100 & 115 kg/hr). The study indicated that at 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed combinations, milling efficiency of the attrition mill was 85 per cent. It was observed that the fineness modulus of 2.04 was recorded at 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed combinations.

Keywords: Attrition mill, Finger millet, Milling efficiency, Fineness modulus

Citation: Shankar M., et al., (2023) Evaluation Studies of Attrition Mill used in Finger Millet Processing Industries. International Journal of Agriculture Sciences, ISSN: 0975-3710 & E-ISSN: 0975-9107, Volume 15, Issue 9, pp.- 12639-12641.

Copyright: Copyright©2023 Shankar M., et al., This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution and reproduction in any medium, provided the original author and source are credited.

Academic Editor / Reviewer: Dr Suresh Kondumahanthi, A. K. Singh

Introduction

Finger millet [*Eleusine coracana* (L.) Gaertn.] commonly known as Ragi, is one of the important small millet crops in red soil areas of southern India. This millet contains 7-9 % protein, 15-20 % dietary fibre and 2-3.5 % minerals; besides, it is a very good source of calcium, and several other micronutrients. The kernels of finger millet are smaller in size and brick red in colour. The colour of finger millet is confined to the seed coat only as its endosperm is milky white and is floury texture in nature to which seed coat is rigidly attached. Because of these peculiar morphological features peeling the seed coat causes fragmentation of the endosperm matter into flour. In case of cereals like wheat, the nature of pulverizers used to make the flour are known to influence the physico- chemical properties and accordingly, the wheat is pulverized depending upon the end use of the flour [1]. The particle distribution and its proportion in the flour depend on the nature of pulverizers used. This kind of information on the quality parameters of finger millet flour is required to identify suitable end uses of the finger millet flour. According to Elyas et al. (2002) [2] the processing of millet for the product manufacturing reduces anti-nutritional factors, thereby resulting bioavailability of nutrients. Hence, there is need to evaluate whether the existing attrition mills used in the finger millet processing industries fulfills the required quality parameters to use the flour of the finger millet for various end uses.

Material and Methods

The experiment was conducted at a finger millet processing industry in Bengaluru. The attrition mill used by the industry consists of one stationary and one rotating cast steel plate positioned vertically and operated by 2.0 hp electric motor. The finger millet grains were fed into the hopper, from where it passes on to the screw conveyor to deliver the feed material in between the two plates. The cast steel plates containing radial grooves allow the grind flour to pass out through the outlet due to centrifugal action. The treatments of the experiment include three plate clearances (0.3, 0.5 & 0.7 mm), three feed rates (90, 100 & 115 kg/hr) and three plate speeds (450, 600 & 700 rpm). GPU-28 variety of cleaned finger millet having 10 per cent moisture (w.b) was used as a test grain to find out the performance of attrition mill. Fifty-four sample bags containing one kg each were separately weighed and used for experiment (9 samples each for plate clearance, plate speed and feed rate).

Graphs were plotted showing milling efficiency against plate clearance, plate speed and feed rate.

Fineness Modulus of Finger Millet Flour

The flour obtained at different plate clearances, feed rates and plate speeds, was analyzed for its fineness modulus. The samples (250 g each) were dried in an oven at 105°C. The dried samples having 10 per cent moisture (w.b) is placed in the top-most sieve and the whole set of 9 sieves is placed on a sieve shaking machine and shaken for 5 minutes. The British Standard Sieves used for different fractions consists of a set of 9 sieves and a pan. The fractions retained on each sieve were weighed adding the weight fraction retained above each sieve and dividing the sum by 100 determined the fineness modulus. Graph was plotted showing fineness of flour obtained against plate clearance, plate speed and feed rate.

Results and Discussion

Milling Efficiency

The data on milling efficiency of the attrition mill analyzed statistically are presented in [Table-1].

Plate clearance

The data in [Fig-1] shows that as the plate clearance increased from 0.3 mm to 0.7 mm the milling efficiency of the attrition mill decreased gradually irrespective of feed rates and plate speeds. The milling efficiency was highest (85 %) when the plate clearance was 0.3 mm, feed rate was 100 kg/hr and plate speed was 600 rpm. The milling efficiency was reduced to 61.70 per cent when the plate clearance increased to 0.7 mm at the same feed rate (100 kg/hr) and plate speed (600 rpm) as compared to that recorded at 0.5 & 0.7 mm clearance, 90 & 115 kg /hr feed rates and 450 & 700 rpm plate speeds.

Milling loss

The data in [Fig-2] indicates that as the plate clearance increased from 0.3 mm to 0.7 mm the milling loss of the attrition mill increased gradually irrespective of feed rates and plate speeds.

Table-1 Effect of plate clearance, feed rate and plate speed on milling efficiency of attrition mill

Treatments	Flour recovery (kg)			Milling loss (kg)			Milling efficiency (%)		
	S1	S2	S3	S1	S2	S3	S1	S2	S3
C1F1	0.741	0.823	0.787	0.259	0.177	0.213	74.10	82.30	78.70
C1F2	0.758	0.850	0.804	0.242	0.150	0.196	75.80	85.00	80.40
C1F3	0.650	0.775	0.758	0.350	0.225	0.242	65.00	77.50	75.80
C2F1	0.717	0.790	0.766	0.283	0.210	0.234	71.70	79.00	76.60
C2F2	0.747	0.822	0.773	0.253	0.178	0.227	74.70	82.20	77.30
C2F3	0.688	0.776	0.756	0.312	0.224	0.244	68.80	77.60	75.60
C3F1	0.418	0.552	0.580	0.582	0.448	0.420	41.80	55.20	58.00
C3F2	0.428	0.617	0.623	0.572	0.383	0.377	42.80	61.70	62.30
C3F3	0.427	0.505	0.570	0.573	0.495	0.430	42.70	50.50	57.00
F test				*	*	*	*	*	*
SEM±				1.1076	0.2586	0.2429	0.6330	1.0461	0.1130
CD at 5%				0.3226	0.7752	0.7431	1.8976	3.1358	0.3386

Table-2 Effect of plate clearance and feed rate on fineness modulus of finger millet flour

Treatments	Fineness modulus		
	Plate speed (450 rpm)	Plate speed (600 rpm)	Plate speed (700 rpm)
	S1	S2	S3
C1F1	2.48	2.18	2.22
C1F2	2.36	2.04	2.16
C1F3	2.65	2.22	2.38
C2F1	2.51	2.47	2.53
C2F2	2.40	2.38	2.38
C2F3	2.70	2.62	2.67
C3F1	3.51	3.46	3.52
C3F2	3.44	3.43	3.34
C3F3	3.66	3.64	3.62
F test	*	*	*
SEM±	0.0101	0.0014	0.1109
CD at 5%	0.0303	0.0043	0.3324

Note: C1, C2, and C3 denote 0.3, 0.5 and 0.7 mm plate clearances respectively. F1, F2 and F3 denote 90, 100 and 115 kg/hr feed rates respectively. S1, S2 and S3 denote 450, 600 and 700 rpm plate speeds respectively. *Denotes significant at 5 % level

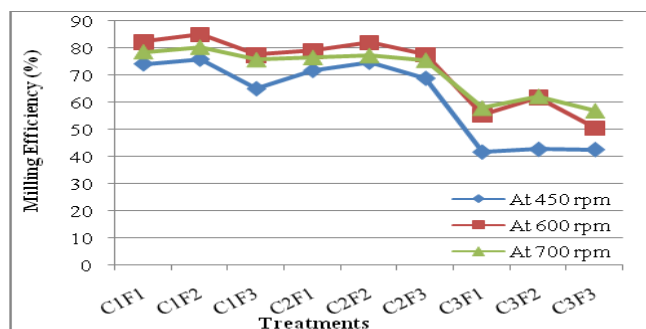


Fig. 1: Effect of plate speed, plate clearance and feed rate on Milling efficiency (%)

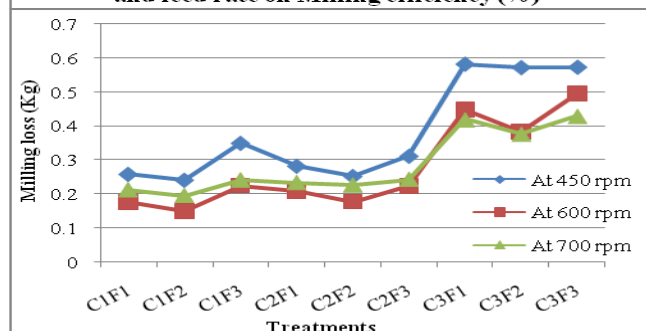


Fig. 2: Effect of plate speed, plate clearance and feed rate on Milling loss (kg)

The lowest milling loss (15 %) was recorded when the plate clearance was 0.3 mm, feed rate was 100 kg/hr and plate speed was 600 rpm. It was highest (38.30 %) when the plate clearance was 0.7 mm at the same feed rate (100 kg/hr) and plate speed (600 rpm) as compared to that recorded at 0.5- & 0.7-mm plate clearance, 90 & 115 kg/hr feed rates and 450 & 700 rpm plate speeds.

Recovery of flour

The data in [Fig-3] reveals that as the plate clearance increased from 0.3 mm to 0.7 mm the recovery of flour of the attrition mill decreased gradually irrespective of

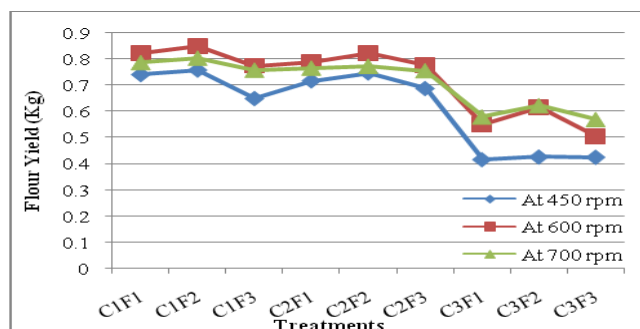


Fig. 3: Effect of plate speed, plate clearance and feed rate on Flour Yield.

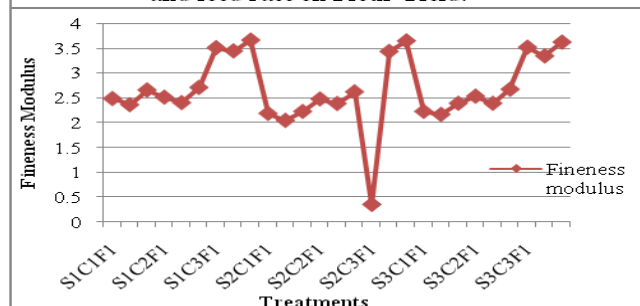


Fig. 4: Effect of plate clearance and feed rate on fineness modulus of finger millet flour at different plate speeds

feed rates and plate speeds. The recovery of flour was highest (85 %) when the plate clearance was 0.3 mm, feed rate was 100 kg/hr and plate speed was 600 rpm. Recovery of flour was reduced to 61.70 per cent when the plate clearance was increased to 0.7 mm at the same feed rate (100 kg/hr) and plate speed (600 rpm) as compared to that recorded at 0.5 & 0.7 mm plate clearance, 90 & 115 kg/hr feed rates and 450 & 700 rpm plate speeds. The data recorded in this study is on far with the data of Ramakumar *et al.* (1997) [3], where they stated that 100 kg/hr feed rate with 0.3-0.5 mm plate clearance found optimum to obtain 86 per cent milling efficiency using burr mill at 10.70 per cent grain moisture (w.b).

Interaction (plate clearance, feed rate and plate speed)

The data on interactions of plate clearance, feed rate and plate speed are presented in [Table-1]. It was observed that, the maximum milling efficiency (85 %) was recorded at 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed combinations (C1F2S2) followed by 82.20 per cent at 0.5 mm plate clearance at the same feed rate (100 kg/hr) and plate speed (600 rpm) combinations (C2F2S2) and 62.30 per cent at 0.7 mm plate clearance, 100 kg/hr feed rate and 700 rpm plate speed combinations (C3F2S3). The study further indicates that milling loss was the least (15 %) at 0.3 mm plate clearance of C1F2S2 combinations followed by 17.80 per cent at 0.5 mm plate clearance of C2F2S2 combinations and 37.70 per cent at 0.7 mm plate clearance of C3F2S3 combinations

Fineness Modulus

The data on fineness modulus of the attrition mill analyzed statistically are presented in [Table-2].

Plate clearance

Plate clearance had significant difference on fineness modulus of flour. The data in [Fig-4] indicates that as the plate clearance increased from 0.3 to 0.7 mm, the fineness modulus of flour increased gradually irrespective of feed rate and plate speed. Higher the value of fineness modulus, lower will be the fineness of flour. It is clear from the figure that the least fineness modulus (2.04) was recorded when the plate clearance was 0.3 mm, at 100 kg/hr feed rate and 600 rpm plate speed. It was increased to 3.43 when the plate clearance increased to 0.7 mm at the same feed rate (100 kg/hr) and plate speed (600 rpm) as compared to that recorded at 0.5 & 0.7 mm plate clearance, 90 & 115 kg/hr feed rates and 450 & 700 rpm plate speeds.

Feed rate

Feed rate also had significant influence on fineness modulus. The data in [Fig-4] indicates that as the feed rate increased from 90 kg/hr to 115 kg/hr the fineness modulus of the attrition mill increased gradually irrespective of plate clearance and plate speeds. The lowest fineness modulus (2.04) was recorded when the feed rate was 100 kg/hr at 0.3 mm plate clearance and plate speed of 600 rpm. It was highest (3.66) when the feed rate was 115 kg/hr at the plate speed of 450 rpm and plate clearance of 0.7 mm as compared to the rest of the treatments under study

Interaction (plate clearance x feed rate x plate speed)

Lower the value of fineness modulus, higher will be the fineness of flour. Among the treatments, 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed (C1F2S2) combinations found better fineness of flour recording least fineness modulus (2.04) followed by 2.16 at 0.3 mm plate clearance 100 kg/hr feed rate and 700 rpm plate speed (C1F2 S3) combinations as compared to the rest of the treatments under study [4].

Conclusion

Milling adds value to the finger millet grains. By milling, the processor is adding value to the finger millet in terms of its acceptability, marketability and profitability. The finger millet is generally pulverized using attrition mill or bur mill and the pulverized flour is used for making various finger millet based food products. The performance of attrition mills used in the finger millet processing units in the south India was evaluated to find out the milling efficiency and the fineness of finger millet flour obtained for various end uses. GPU-28 variety of finger millet having 10 per cent moisture content (w.b) was used for the evaluation study. From the study it can be concluded that;

- (i) Milling efficiency of the attrition mills used for milling finger millet was 85 per cent at 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed combinations, followed by the milling efficiency of 82.20 per cent at 0.5 mm plate clearance 100 kg/hr feed rate and 600 rpm plate speed combinations.
- (ii) Milling loss was the least (15.00 %) at 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed combinations, followed by 17.80 per cent at 0.5 mm plate clearance, 100 kg/hr feed rate and 600 rpm combinations

- (iii) Least fineness modulus of 2.04 was recorded at 0.3 mm plate clearance, 100 kg/hr feed rate and 600 rpm plate speed combinations indicating better fineness of flour, followed by fineness modulus of 2.16 at 0.3 mm plate clearance, 100 kg/h feed rate and 700 rpm plate speed.

Application of research: Processing of finger millet and its value addition

Research Category: Agriculture Engineering

Acknowledgement / Funding: Authors are thankful to Zonal Agricultural and Horticultural Research Station, Brahmar, Udupi, 576213, Keladi Shivappa Nayaka University of Agricultural and Horticultural Sciences, Shivamogga, 577412, Karnataka, India

****Principal Investigator or Chairperson of research: Shankar M.**

University: Keladi Shivappa Nayaka University of Agricultural and Horticultural Sciences, Shivamogga, 577412, Karnataka, India

Research project name or number: Research station study

Author Contributions: All authors equally contributed

Author statement: All authors read, reviewed, agreed and approved the final manuscript. Note-All authors agreed that- Written informed consent was obtained from all participants prior to publish / enrolment

Study area / Sample Collection: Karnataka

Cultivar / Variety / Breed name: Finger millet GPU 28 variety

Conflict of Interest: None declared

Ethical approval: This article does not contain any studies with human participants or animals performed by any of the authors.

Ethical Committee Approval Number: Nil

References

- [1] Saxena R.C. and Rao P.H. (1997) *Sci. Aliment*, 17, 183-191.
- [2] Elyas Sha E.L., Tinay A.H., Yousif N.E. and Elesheikh E.A.E. (2002) *Food Chem.*, 78, 75-79.
- [3] Ramakumar M.V., Ranganna B., Subramanya S. and Babu C.K. (1997) *Mysore J. of Agril. Sci.*, 31, 244-250.
- [4] Reddy N.R., Sathe S.K. and Salunkhe D.K. (1982) *Adv Food Res.*, 28, 1-92.